



OUTDOOR LIGHTING

# LED FLOOD LIGHT

S P E C I F I C A T I O N   S H E E T





## Features

- Isolated waterproof connector: Use industrial grade coarse wire and strictly waterproof plug.
- Flexible installation: 180 ° rotation installation, dead-zone free lighting design.
- High quality tempered glass: high temperature resistance, transmittance up to 99%.
- Lamp body: precision die casting aviation aluminum, high hardness, fast heat dissipation.

## Applications



## Detailed description

1. Waterproof IP66 Rating.
2. Application: garden, school, square, yard, Residential community.
3. Ultra-thin integrated design, PMA material, anti-yellow and not fragile.

## Product Dimension

**10W**  
MODEL NUMBER AT-FL4-10W

Color	Color Temp
Cold White	6500K
Natural white	4000K
Warm white	3000K

**20W**  
MODEL NUMBER AT-FL4-20W

Color	Color Temp
Cold White	6500K
Natural white	4000K
Warm white	3000K

**30W**  
MODEL NUMBER AT-FL4-30W

Color	Color Temp
Cold White	6500K
Natural white	4000K
Warm white	3000K

**50W**  
MODEL NUMBER AT-FL4-50W

Color	Color Temp
Cold White	6500K
Natural white	4000K
Warm white	3000K

**100W**  
MODEL NUMBER AT-FL4-100W

Color	Color Temp
Cold White	6500K
Natural white	4000K
Warm white	3000K

**150W**  
MODEL NUMBER AT-FL4-150W

Color	Color Temp
Cold White	6500K
Natural white	4000K
Warm white	3000K


**200W**  
MODEL NUMBER AT-FL4-200W

Color	Color Temp
Cold White	6500K
Natural white	4000K
Warm white	3000K


## Specifications

Model number	Power	Size(mm)	IP	Luminous flux	Beam Angle	Material
AT-FL4-10W	10W	100x80x23	66	900lm	120°	Glass+Aluminum
AT-FL4-20W	20W	125x100x25	66	1800lm	120°	Glass+Aluminum
AT-FL4-30W	30W	142x114x28	66	2700lm	120°	Glass+Aluminum
AT-FL4-50W	50W	162x132x31	66	4500lm	120°	Glass+Aluminum
AT-FL4-100W	100W	230x186x33	66	9000lm	120°	Glass+Aluminum
AT-FL4-150W	150W	270x220x36	66	13500lm	120°	Glass+Aluminum
AT-FL4-200W	200W	320x260x37.5	66	18000lm	120°	Glass+Aluminum


## Installation notes

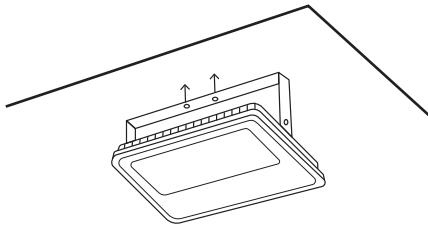


Fixed to the wall




Rotation adjustment angle




Connect the power cord



Wall mounted




Base mounted




Hang mounted


## Packing



Box

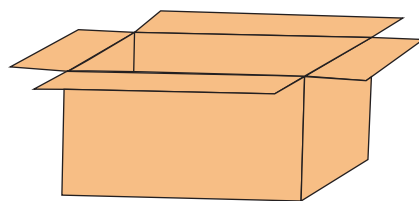

Carton

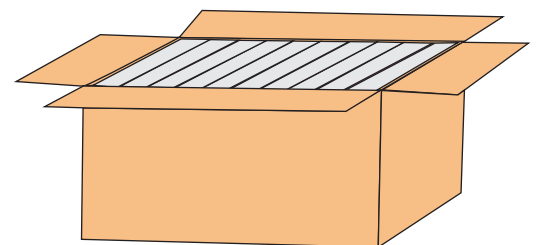

Packing

# LED FLOODLIGHT LIGHT



Model number	Power	Packing size(mm)	Carton size(mm)	QTY/Carton
AT-FL4-10W	10W	115x100x28	520x305x130	50
AT-FL4-20W	20W	142x116x32	605x345x155	50
AT-FL4-30W	30W	155x127x35	530x385x175	40
AT-FL4-50W	50W	175x144x35	375x305x190	20
AT-FL4-100W	100W	245x198x40	425x205x260	10
AT-FL4-150W	150W	285x232x42	445x240x300	10
AT-FL4-200W	200W	335x272x42	445x280x350	10