


GARDEN REVIVAL
GARDEN CLASSIC
BOLLARD
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BULKHEAD
SOLAR
URBAN CLASSIC
URBAN REVIVAL
URBAN MODERN
POST
LAMPS

GELMI RANGE

ROUND



Round bulkhead lamp with ring, eyelid or grid cover. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.

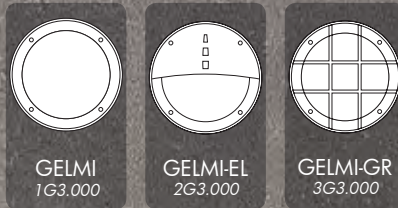

Plafoniera circolare con cover ad anello, a palpebra o a griglia. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione a LED GX53 con Kelvin impostabile o E27. Classe di isolamento II, grado di protezione IP66.



2G3.000

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6

RECYCLABLE	ANTI-SHOCK	TEMPERATURE		WALL	CEILING	

MADE IN ITALY



GELMI - COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized. Ring, eyelid and grid versions available.

***COVER** in resina antiurto stabilizzata ai raggi UV, disponibile nella versione ad anello, a palpebra e a griglia.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

***DIFFUSORE** opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

BASE made of shockproof resin material, UV-rays stabilized. Provided with GX53 lampholder or with white resin reflective plate and E27 lampholder.

***BASE** realizzata in resina antiurto, stabilizzata ai raggi UV. Fornita completa di portalampana GX53 o di piatto riflettente in resina bianca e portalampana E27.*

GELMI



Dimensions and weight

Diameter: \varnothing 313 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 636.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

GX53 LED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient and Kelvin settable **GX53 LED lamp included**. Different wattage available.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	11,3 W	1510 lm	6500 K	.B1K
			4000 K	
			2700 K	
	17 W	2350 lm	6500 K	.E1K
			4000 K	
			2700 K	



11,3W
17W

= 100W
150W

incandescent



SAVE 88%

E27



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

E27 (CFL -LED)	max 160 mm	*ADD. SUFFIX .E27
E27 + SENSOR (CFL -LED)		.ES7

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GELMI RANGE

ROUND



MADE IN ITALY



GELMI GX53	
11,3W	1G3.000.B1K
17W	1G3.000.E1K
CCT SETTABLE GX53 LED LAMP INCLUDED 2700K/4000K/6500K	
<p>Pcs 16 Kg 20 mc 0,194</p>	

GELMI E27	
E27 lampholder	1G3.000.E27
E27 with sensor	1G3.000.E57
<p>Pcs 16 Kg 16,8 mc 0,194</p>	

GELMI-EL GX53	
11,3W	2G3.000.B1K
17W	2G3.000.E1K
CCT SETTABLE GX53 LED LAMP INCLUDED 2700K/4000K/6500K	
<p>Pcs 16 Kg 20 mc 0,194</p>	

GELMI-EL E27	
E27 lampholder	2G3.000.E27
E27 with sensor	2G3.000.E57
<p>Pcs 16 Kg 16,8 mc 0,194</p>	

GELMI-GR GX53	
11,3W	3G3.000.B1K
17W	3G3.000.E1K
CCT SETTABLE GX53 LED LAMP INCLUDED 2700K/4000K/6500K	
<p>Pcs 16 Kg 20 mc 0,194</p>	

GELMI-GR E27	
E27 lampholder	3G3.000.E27
E27 with sensor	3G3.000.E57
<p>Pcs 16 Kg 16,8 mc 0,194</p>	