

GARDEN REVIVAL
GARDEN CLASSIC
BOLLARD
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BULKHEAD
SOLAR
URBAN CLASSIC
URBAN REVIVAL
URBAN MODERN
POST
LAMPS


UMBERTA

LARGE ROUND



Round bulkhead lamp with **no visible screws**. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin settable GX53 LED** or **2xE27** version available. Provided as option with motion sensor or emergency kit. Insulation class II, Protection rating IP66.

*Plafoniera circolare **senza viti a vista**, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione a **LED GX53 con Kelvin impostabile** o **2xE27**. Fornita anche con sensore o kit d'emergenza. Classe di isolamento II, grado di protezione IP66.*



1B3.000

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6





UMBERTA - COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free.

COVER in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.

BASE complete with highly heat resistant **REFLECTIVE PLATE**, suitable for the electrical devices fixation. Provided with GX53 or E27 lampholder and with silicone rubber gasket to ensure high protection against external agents.

BASE completa di PIATTO RIFLETTEnte ad alta resistenza al calore, adatto ad alloggiare gli accessori elettrici. Fornita completa di portalampada GX53 o E27 e guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

UMBERTA

— ø 350 —



Dimensions and weight

Diameter: ø 350 mm
Depth: 94 mm
Weight: 1,3 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:

Opal


LED LAMPS



LVD EMC ERP

Comply with: EU2019/2015
EU2019/2020
Technical details on page 636.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

EMERGENCY VERSION



Detailed information on page 256

1B3.000.EM1

GX53 LED

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattage available. Quick and easy lamp replacement for a very simple maintenance after installation. Daylight and motion sensor available as option.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	11,3 W	1510 lm	6500 K	.B1K
			4000 K	
			2700 K	
	17 W	2350 lm	6500 K	.E1K
			4000 K	
			2700 K	
	11,3 W + SENSOR	1510 lm	6500 K	.BSK
			4000 K	
			2700 K	
	17 W + SENSOR	2350 lm	6500 K	.ESK
			4000 K	
			2700 K	

E27

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** with single or double **E27 lampholder**. Daylight and motion sensor available as option. Sensor operating voltage: 220-240V. (120V version available on demand).

*ADD. SUFFIX

E27 (CFL -LED)	.E27
2x E27 (CFL -LED)	.E28
E27 + SENSOR (CFL -LED)	.ES7
2x E27 + SENSOR (CFL -LED)	.ES8

11,3W **17W** = **100W** **150W** incandescent

SAVE 88%

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE


GARDEN REVIVAL
GARDEN CLASSIC
BOLLARD
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BULKHEAD
SOLAR
URBAN CLASSIC
URBAN REVIVAL
URBAN MODERN
POST
LAMPS

LAMPS POST URBAN MODERN URBAN REVIVAL URBAN CLASSIC SOLAR BULKHEAD IN-GROUND DOWNLIGHT UP&DOWN BOLLARD GARDEN CLASSIC GARDEN REVIVAL

UMBERTA

LARGE ROUND



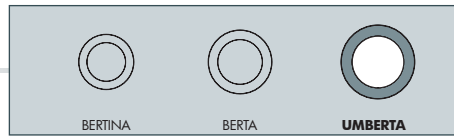

UMBERTA GX53	
11,3W	1B3.000.B1K
17W	1B3.000.E1K
CCT SETTABLE GX53 LED LAMP INCLUDED 2700K/4000K/6500K	
Pcs 12	
Kg 22	
mc 0,198	

UMBERTA E27	
1xE27 lampholder	1B3.000.E27
2xE27 lampholder	1B3.000.E28
1xE27 with sensor	1B3.000.E57
2xE27 with sensor	1B3.000.E58
Pcs 12	
Kg 19,6	
mc 0,198	