



LOW VOLTAGE X5 CURRENT TRANSFORMER




AT

Doğruluk (Class)	0.5
Operating Temperature	-25°C to 55°C
Voltage Test	720VAC
Operating Frequency	50 / 60 Hz
High Voltage Test	4KV 50Hz./min.
Standart	IEC44-1, BS3938 ve DIN 42600
Cable Diameter	2.5mm ²
Connection Type	Cable or bar inside the panel must be inside
Mounting	DIN rail mounting
Protection Class	IP20
Operating Altitude	<2000 meters



Product Code	Body	Input/Output Current	Output Power
AT-30	SF 62/20	30/5A	2.5
AT-40	SF 62/20	40/5A	2.5
AT-50	SF 62/20	50/5A	2.5
AT-60	SF 62/20	60/5A	2.5
AT-75	SF 62/20	75/5A	2.5
AT-100	SF 62/30	100/5A	5
AT-125	SF 62/30	125/5A	5
AT-150	SF 62/30	150/5A	5
AT-200	SF 62/40	200/5A	10
AT-250	SF 62/40	250/5A	10
AT-300	SF 62/40	300/5A	10
AT-400	SF 62/40	400/5A	10
AT-500	SF 62/40	500/5A	10
AT-600	SF 62/50	600/5A	10
AT-750	SF 74/50	750/5A	10
AT-800	SF 74/50	800/5A	10
AT-1000	SF 74/50	1000/5A	15
AT-1250	SF 86/60	1250/5A	15
AT-1500	SF 140/100	1500/5A	15
AT-2000	SF 140/100	2000/5A	20
AT-2500	SF 140/100	2500/5A	20
AT-3000	SF 140/100	3000/5A	30
AT-4000	SF 140/100	4000/5A	35
AT-5000	SF 140/100	5000/5A	45

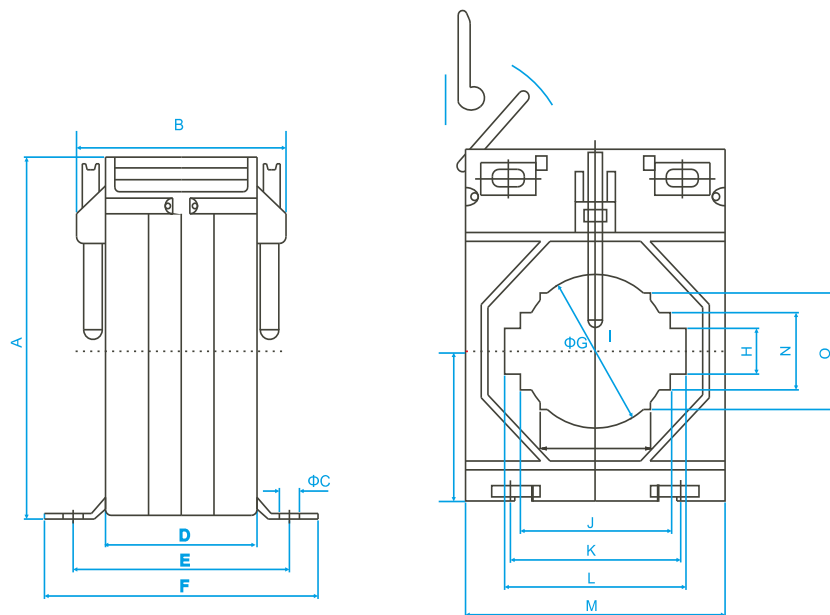

Product Code (mm)	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
AT-30, AT-40, AT-50, AT-60, AT-75	78	36	6.6	36	55	71	30.1	30.1	11	23	44	21	62	21	26
AT-100, AT-125, AT-150	78	47	6.6	35	55	71	31	31	16	31	44	31	62	21	26
AT-200, AT-250, AT-300, AT-400, AT-500	78	47	6.6	35	55	71	33	33	11	31	47	41	74	21	31
AT-750, AT-800, AT-1000	98	61	6.6	45	67	81	51	51	21	51	68	51	86	31	44
AT-1250	110	56	6.6	40	62	76	65	65	31	61	86	61	104	31	56

