

Rotary Switches

SAB□ Series




Main technical parameter


Description	Ith A	Ui V	Ue V	AC-21A	AC-22A	AC-23A		AC-2		AC-3		AC-4		AC-15	DC-13
				Ie A	Ie A	Ie A	P kW	Ie A	P kW	Ie A	P kW	Ie A	P kW	Ie A	Ie A
SAB16	16	660 / 690	440	16	16	13	7.5	15	7.5	11	5.5	3.5	1.5	4	
			240											5	1
			120												5
SAB25	25		440	25	25	22	11	22	11	15	7.5	6.5	3	5	
			240											8	
			120												9
SAB32	32		440	32	32	30	15	30	15	22	11	11	5.5	6	
			240											14	11
			120												25
SAB50	50		440	50	40		22				18.5		7.5		
			240											11	
			120	Rated working voltage Ue											
SAB75	75		440	75(DC)	75	72	45	72	45	47	24	23	11.5		
			240												
			120												60
Switch life	No load		8500										Electric life 3×10 ⁴		
	Load		1500										Mechanical life 5×10 ⁴		
	Total		10000												

Ordering Information


SAB□□□□R

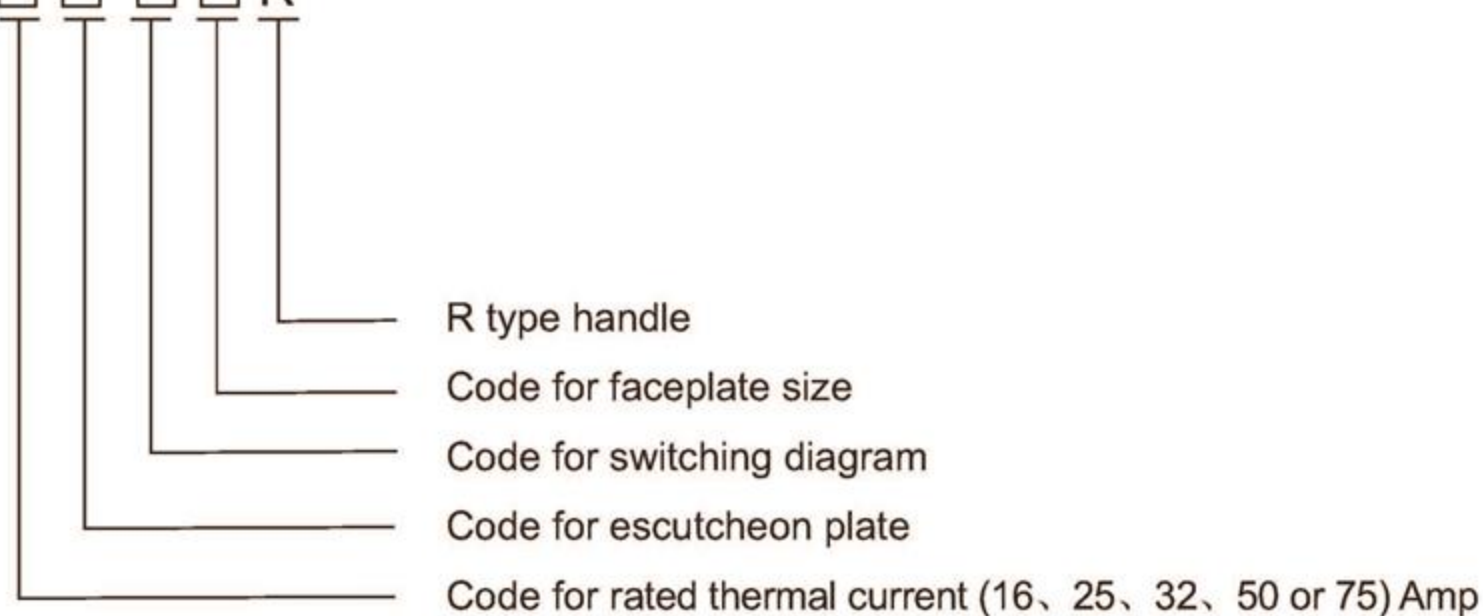

Dimension and installation

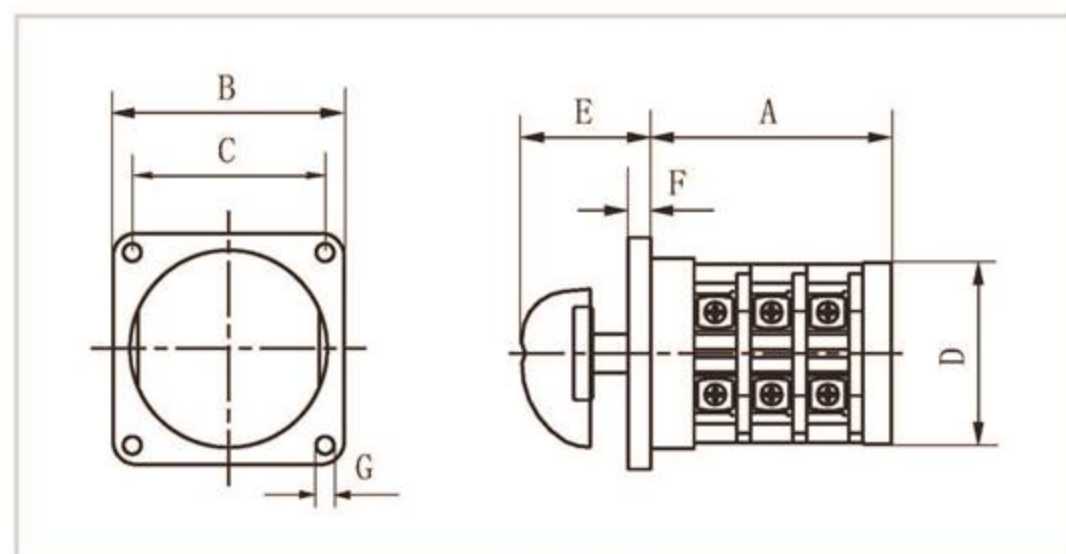

Description	Joint number (A)				Installation(mm)					
	1	2	3	4	□B	□C	D	E	F	G
SAB16	37	50	62	75	54	36	φ44	28	8	4.5
SAB25	37	50	62	75	72	58	φ59	32	9	4.5
SAB32	41	59	77	95	72	58	φ59	32	9	4.5
SAB50	52	70	88	106	105	72	φ80	42	10	5.5
SAB75	61	88	115	142	105	72	φ80	42	10	5.5

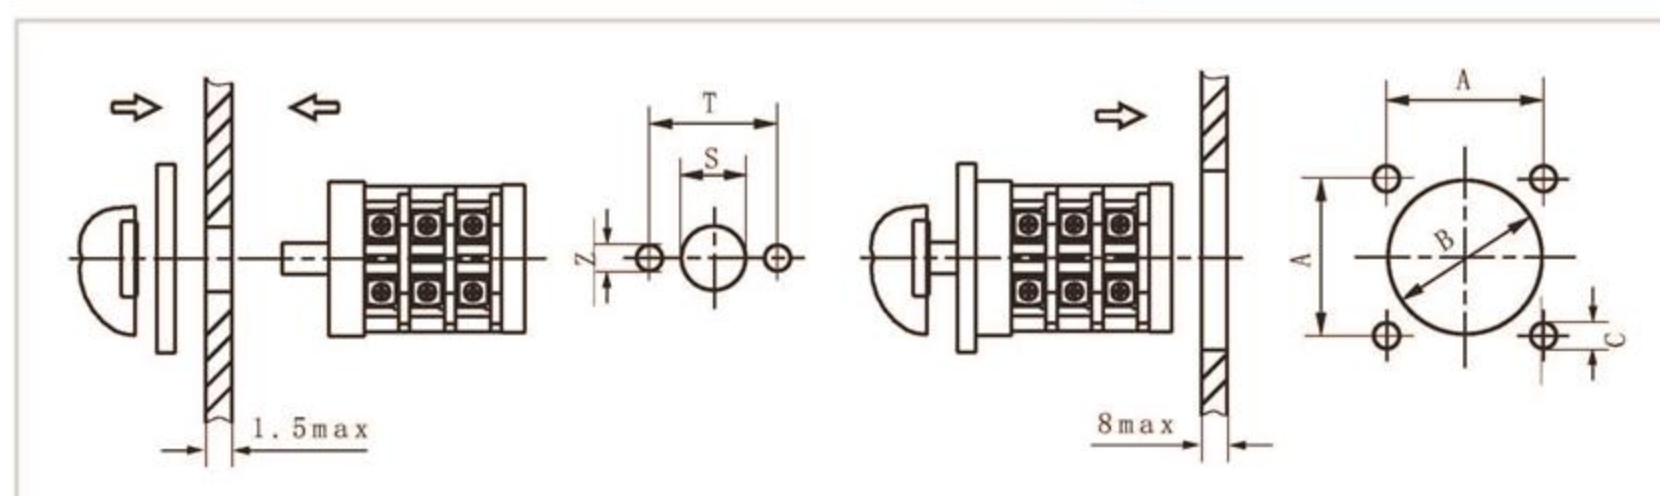

Description	Installation(mm)					
	S	T	Z	A	B	C
SAB16	9.5	32	3.2	36	45	M4
SAB25	9.5	33	3.2	58	64	M4
SAB32	9.5	33	3.2	58	64	M4
SAB50	13	46	5.3	85	90	M5
SAB75	13	46	5.3	85	90	M5