



Product designation
Product type designation

Power contactor
BF12

Contact characteristics

| | | |
|--------------------------------------------------------------------------------|----------------------------------------------------|-------|
| Number of poles | Nr. | 3 |
| Rated insulation voltage U_i IEC/EN | V | 690 |
| Rated impulse withstand voltage U_{imp} | kV | 6 |
| Operational frequency | min Hz | 25 |
| | max Hz | 400 |
| IEC Conventional free air thermal current I_{th} | A | 28 |
| Operational current I_e | AC-1 ($\leq 40^\circ\text{C}$) | A 28 |
| | AC-1 ($\leq 55^\circ\text{C}$) | A 23 |
| | AC-1 ($\leq 70^\circ\text{C}$) | A 20 |
| | AC-3 ($\leq 440\text{V } \leq 55^\circ\text{C}$) | A 12 |
| | AC-4 (400V) | A 7.9 |
| Rated operational power AC-3 ($T \leq 55^\circ\text{C}$) | 230V kW | 3.2 |
| | 400V kW | 5.7 |
| | 415V kW | 6.2 |
| | 440V kW | 5.5 |
| | 500V kW | 5 |
| | 690V kW | 5 |
| Rated operational power AC-1 ($T \leq 40^\circ\text{C}$) | 230V kW | 10 |
| | 400V kW | 18 |
| | 500V kW | 23 |
| | 690V kW | 32 |
| IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series | $\leq 24\text{V}$ A | 17 |
| | 48V A | 15 |
| | 75V A | 13 |
| | 110V A | 6 |
| | 220V A | — |
| IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series | $\leq 24\text{V}$ A | 20 |
| | 48V A | 20 |
| | 75V A | 18 |
| | 110V A | 13 |
| | 220V A | 1 |
| IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series | $\leq 24\text{V}$ A | 22 |
| | 48V A | 22 |
| | 75V A | 20 |
| | 110V A | 16 |

| | | | |
|----------------------------------------------------------------------------------|-----------------|------|-----|
| | 220V | A | 11 |
| IEC max current I _e in DC1 with L/R ≤ 1ms with 4 poles in series | | | |
| | ≤24V | A | 20 |
| | 48V | A | 20 |
| | 75V | A | 20 |
| | 110V | A | 16 |
| | 220V | A | 12 |
| IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 1 poles in series | | | |
| | ≤24V | A | 12 |
| | 48V | A | 11 |
| | 75V | A | 10 |
| | 110V | A | 2 |
| | 220V | A | – |
| IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 2 poles in series | | | |
| | ≤24V | A | 15 |
| | 48V | A | 13 |
| | 75V | A | 12 |
| | 110V | A | 8 |
| | 220V | A | 2 |
| IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 3 poles in series | | | |
| | ≤24V | A | 18 |
| | 48V | A | 18 |
| | 75V | A | 15 |
| | 110V | A | 12 |
| | 220V | A | 6 |
| IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 4 poles in series | | | |
| | ≤24V | A | 15 |
| | 48V | A | 15 |
| | 75V | A | 15 |
| | 110V | A | 16 |
| | 220V | A | 7 |
| Short-time allowable current for 10s (IEC/EN60947-1) | | A | 150 |
| Protection fuse | | | |
| | gG (IEC) | A | 32 |
| | aM (IEC) | A | 12 |
| Making capacity (RMS value) | | A | 120 |
| Breaking capacity at voltage | | | |
| | 440V | A | 96 |
| | 500V | A | 96 |
| | 690V | A | 94 |
| Resistance per pole (average value) | | mΩ | 2.5 |
| Power dissipation per pole (average value) | | | |
| | I _{th} | W | 2 |
| | AC-3 | W | 0.4 |
| Tightening torque for terminals | | | |
| | min | Nm | 1.5 |
| | max | Nm | 1.8 |
| | min | lbin | 1.1 |
| | max | lbin | 1.5 |
| Tightening torque for coil terminal | | | |
| | min | Nm | 0.8 |
| | max | Nm | 1 |
| | min | lbin | 0.8 |

| | | | |
|-----------------------------------------------------|-----------------------------------------|------------------|--------------------------|
| | max | I _{bin} | 0.74 |
| Max number of wires simultaneously connectable | | Nr. | 2 |
| Conductor section | | | |
| AWG/Kcmil | max | | 10 |
| Flexible w/o lug conductor section | min | mm ² | 1 |
| | max | mm ² | 6 |
| Flexible c/w lug conductor section | min | mm ² | 1 |
| | max | mm ² | 4 |
| Flexible with insulated spade lug conductor section | min | mm ² | 1 |
| | max | mm ² | 4 |
| Power terminal protection according to IEC/EN 60529 | | | IP20 when properly wired |
| Mechanical features | | | |
| Operating position | normal allowable | | Vertical plan ±30° |
| Fixing | | | Screw / DIN rail 35mm |
| Weight | | g | 365 |
| Auxiliary contact characteristics | | | |
| Thermal current I _{th} | | A | 10 |
| IEC/EN 60947-5-1 designation | | | A600 - P600 |
| Operating current AC15 | 230V | A | 3 |
| | 400V | A | 1.9 |
| | 500V | A | 1.4 |
| Operating current DC12 | 110V | A | 5.7 |
| Operating current DC13 | 24V | A | 5.7 |
| | 48V | A | 2.9 |
| | 60V | A | 2.3 |
| | 110V | A | 1.25 |
| | 125V | A | 1.1 |
| | 220V | A | 0.55 |
| | 600V | A | 0.2 |
| Operations | | | |
| Mechanical life | | cycles | 20000000 |
| Electrical life | | cycles | 2000000 |
| Safety related data | | | |
| Performance level B10d according to EN/ISO 13489-1 | rated load | cycles | 2000000 |
| | mechanical load | cycles | 20000000 |
| EMC compatibility | | | yes |
| AC coil operating | | | |
| Rated AC voltage at 50/60Hz | | V | 400 |
| AC operating voltage | | | |
| | of 50/60Hz coil powered at 50Hz pick-up | | |

| | | | | | | |
|-------------------------------------|--------------------------------------------------|--|----------|---------|---------------|----|
| | | | min | %Us | 80 | |
| | | | max | %Us | 110 | |
| | drop-out | | min | %Us | 20 | |
| | | | max | %Us | 55 | |
| | of 50/60Hz coil powered at 60Hz | | | | | |
| | pick-up | | min | %Us | 85 | |
| max | | | %Us | 110 | | |
| | drop-out | | min | %Us | 20 | |
| | | | max | %Us | 55 | |
| AC average coil consumption at 20°C | | | | | | |
| of 50/60Hz coil powered at 50Hz | | | | | | |
| | | | in-rush | VA | 75 | |
| | | | holding | VA | 9 | |
| of 50/60Hz coil powered at 60Hz | | | | | | |
| | | | in-rush | VA | 70 | |
| | | | holding | VA | 6.5 | |
| of 60Hz coil powered at 60Hz | | | | | | |
| | | | in-rush | VA | 75 | |
| | | | holding | VA | 9 | |
| Dissipation at holding ≤20°C 50Hz | | | | | W 2.5 | |
| Max cycles frequency | | | | | | |
| Mechanical operation | | | | | cycles/h 3600 | |
| Operating times | | | | | | |
| Average time for Us control | | | | | | |
| in AC | | | | | | |
| | Closing NO | | min | ms | 8 | |
| | | | max | ms | 24 | |
| | Opening NO | | min | ms | 10 | |
| | | | max | ms | 20 | |
| | Closing NC | | min | ms | 14 | |
| | | | max | ms | 28 | |
| | Opening NC | | min | ms | 7 | |
| | | | max | ms | 18 | |
| | UL technical data | | | | | |
| | Rated operational voltage AC (UL) | | | | V 600 | |
| | Full-load current (FLA) for three-phase AC motor | | | | | |
| | | | | at 480V | A | 11 |
| at 600V | | | | A | 11 | |
| Yielded mechanical performance | | | | | | |
| for single-phase AC motor | | | | | | |
| | | | 110/120V | HP | 1 | |
| | | | 230V | HP | 2 | |
| for three-phase AC motor | | | | | | |
| | | | 200/208V | HP | 5 | |
| | | | 220/230V | HP | 5 | |
| | | | 460/480V | HP | 7.5 | |
| | | | 575/600V | HP | 10 | |
| | | | | | | |

General USE

Contactor

AC current A 28

Auxiliary contacts

AC voltage V 600

AC current A 10

DC voltage V 250

DC current A 1

Short-circuit protection fuse, 600V

High fault

Short circuit current kA 100

Fuse rating A 30

Fuse class J

Standard fault

Short circuit current kA 5

Fuse rating A 70

Contact rating of auxiliary contacts according to UL

A600 - P600

Ambient conditions

Temperature

Operating temperature

min °C -50

max °C 70

Storage temperature

min °C -60

max °C 80

Max altitude


m 3000

Resistance & Protection


Pollution degree

3

Dimensions

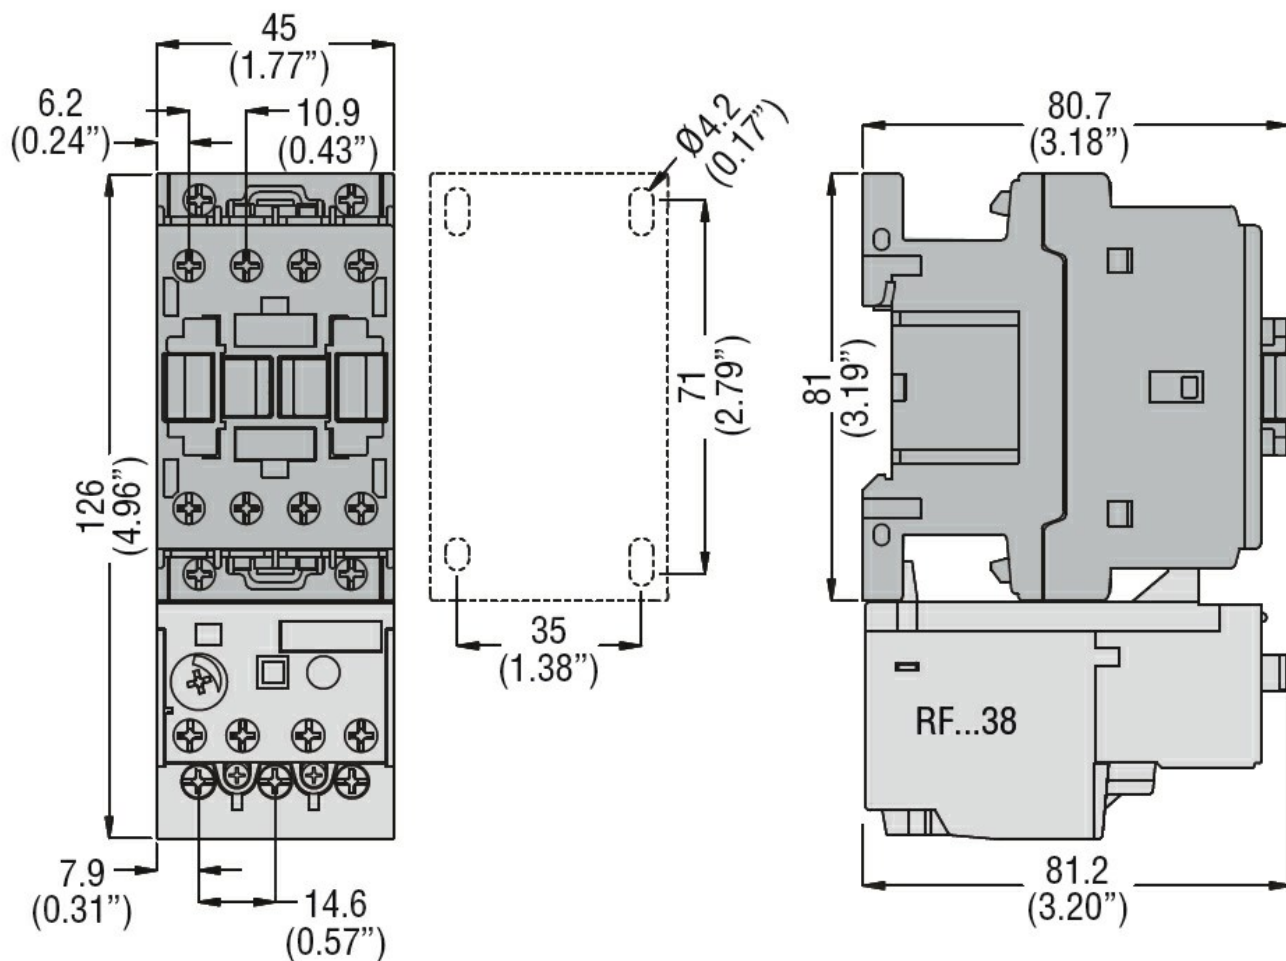

Wiring diagrams

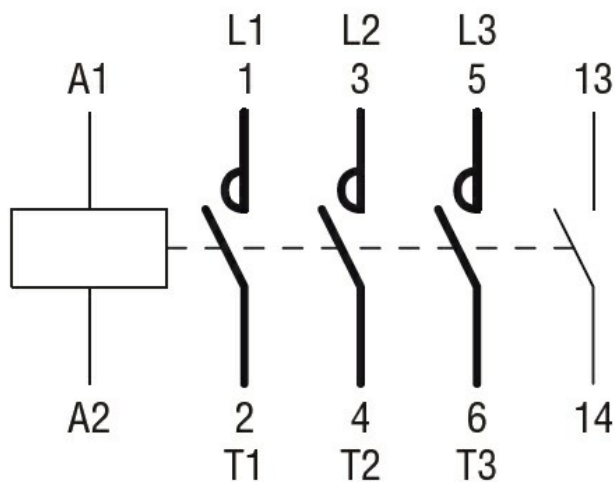

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching