




CMK系列快速接线端子

CMK SERIES PUSH IN QUICK-CONNECTORS

Material of connectors shell: Polycarbonate PC
 Material of actuating levers: Polyamide Pa66
 Material of conductive parts: Thinned copper
 Material of contact springs: AISI 301 stainless steel
 Rated voltage(V): 450V AC
 Rated current(A): 32A
 Connection capacity: 0.08-4mm²
 Type of electric connection: Equipotential
 Working temperature: -40°C to 105°C
 Strip length: 11mm/0.43 Inch



Product Code	Connector type	No. of circuits	Flexible wire mm ²	Rigid wire mm ²	Volt (V)	Ampere (A)	Un	Un
CMK-421		2	0.08→2.5	0.2→4	450 V	32 A	50	2000
CMK-401		2					50	3000
CMK-422		4					50	1500
CMK-423		6					50	2000
CMK-424		8					50	1000
CMK-425		10					50	1800



CMK-421



CMK-401



CMK-422




CMK-423





CMK-424




CMK-425






CMK-421




CMK-401



CMK-422



CMK-423





CMK系列快速接线端子

CMK SERIES PUSH IN QUICK-CONNECTORS

Material of connectors shell: Polycarbonate PC
 Material of actuating levers: Polyamide Pa66
 Material of conductive parts: Thinned copper
 Material of contact springs: AISI 301 stainless steel
 Rated voltage(V): 450V AC
 Rated current(A): 32A
 Connection capacity: 0.08-4mm²
 Type of electric connection: Equipotential
 Working temperature: -40°C to 105°C
 Strip length: 11mm/0.43 Inch



Product Code	Connector type	No. of circuits	Flexible wire mm ²	Rigid wire mm ²	Volt (V)	Ampere (A)	 Un	 Un
CMK422-4		6	0.08→2.5	0.2→4	450 V	32 A	40	1600
CMK422-6		8					30	1200
CMK422-8		10					20	800
CMK421-2		3					50	3000
CMK421-3		4					50	3000
CMK421-4		5					50	3000



CMK-421-2



CMK-421-3



CMK-421-4




CMK-422-4



CMK-422-6



CMK-422-8

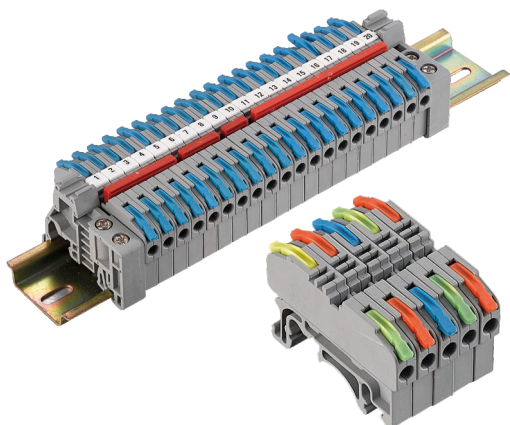

CMK系列快速接线端子

CMK SERIES PUSH IN QUICK-CONNECTORS

Material of connectors shell: Polyamide Pa66

Material of actuating levers: Polyamide Pa66

Material of conductive parts: Thinned copper

Material of contact springs: AISI 301 stainless steel

Rated voltage(V): 450V AC

Rated current(A): 32A

Connection capacity: 0.08-4mm²

Type of electric connection: Equipotential

Working temperature: -20°C to 85°C

Strip length: 11mm/0.43 Inch



Product Code	Connector type	No. of circuits	Flexible wire mm ²	Rigid wire mm ²	Volt (V)	Ampere (A)	 Un	 Un
CMK-420		2	0.08→2.5	0.2→4	450 V	32 A	25	1500
CMK-420J		2	0.08→2.5	0.2→4	450 V	32 A	25	1500



CMK-420/2Y



CMK-420/3Y



CMK-420/4Y



CMK-420/5Y



CMK-420/10Y