


Rotary Switches

SA□ Series Padlock type



Ordering Information

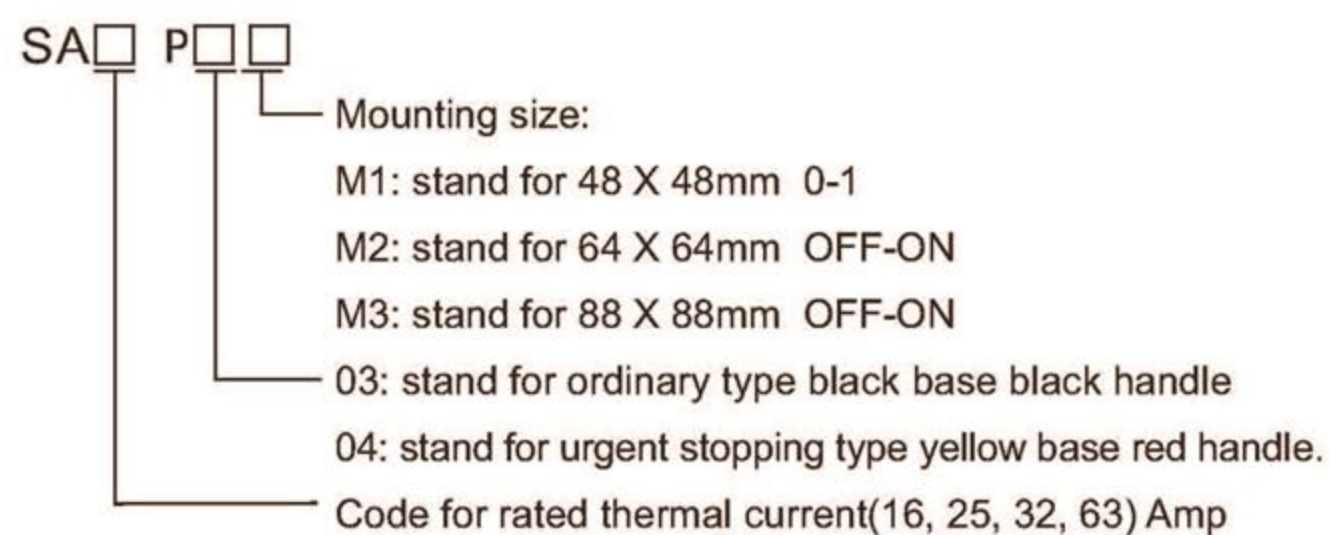


For example: SA16 P04M1
16amp, urgent stopping type, 48×48 mount size.

Technical parameters


Description		SA16	SA25	SA32	SA63
Rated insulation voltage Ui	V	660/690	660/690	660/690	660/690
Rated working voltage Ue	V	440	440	440	440
Rated thermal current Ith	A	16	25	32	63
Rated working current Ie					
AC-21A	A	16	25	32	63
AC-22A	A	16	25	32	63
AC-23A	A	13	22	30	57
Rated control power					
AC-23A	kW	7.5	11	15	30
Switch life					
Non-load		8500	8500	8500	8500
Load		1500	1500	1500	1500
Total		10000	10000	10000	10000

Dimension and installation

SA16 P□M1 Small faceplate with padlock

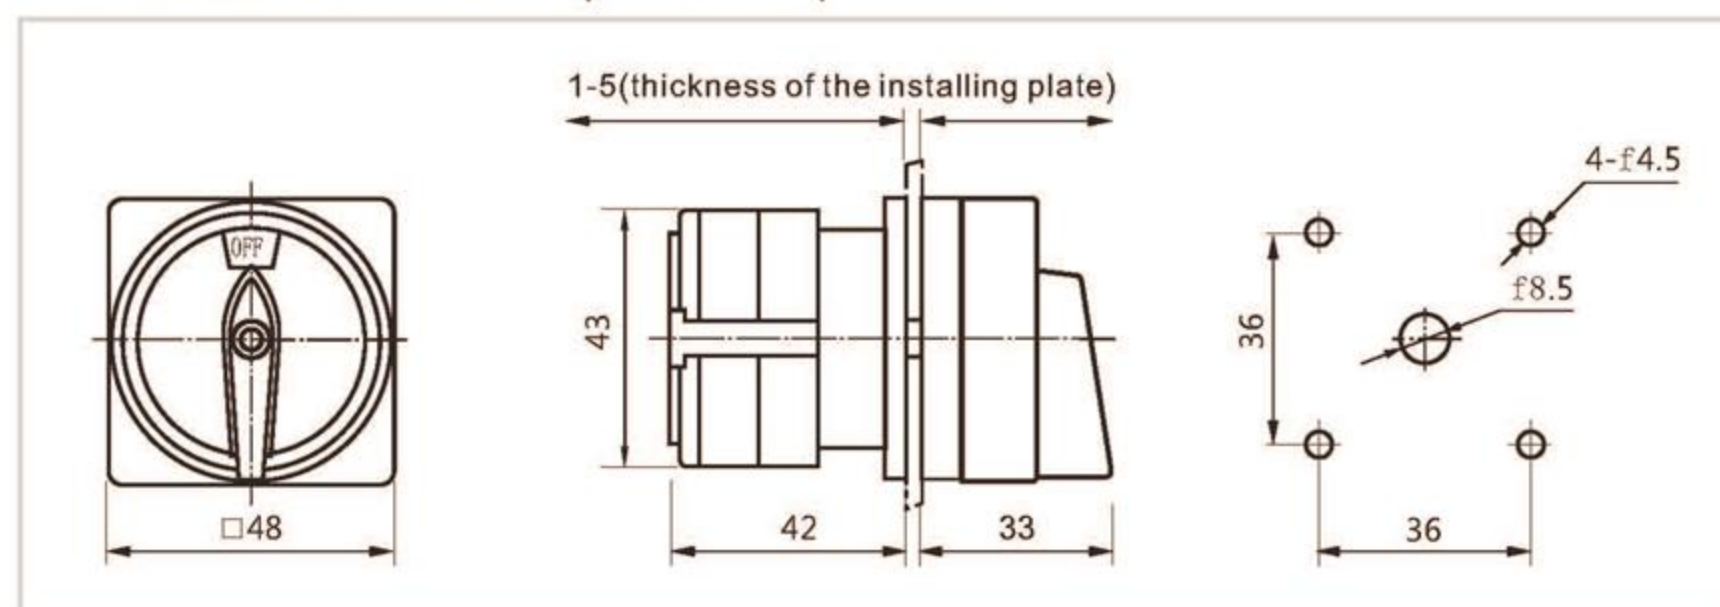

SA□ P□M2 Large faceplate with padlock

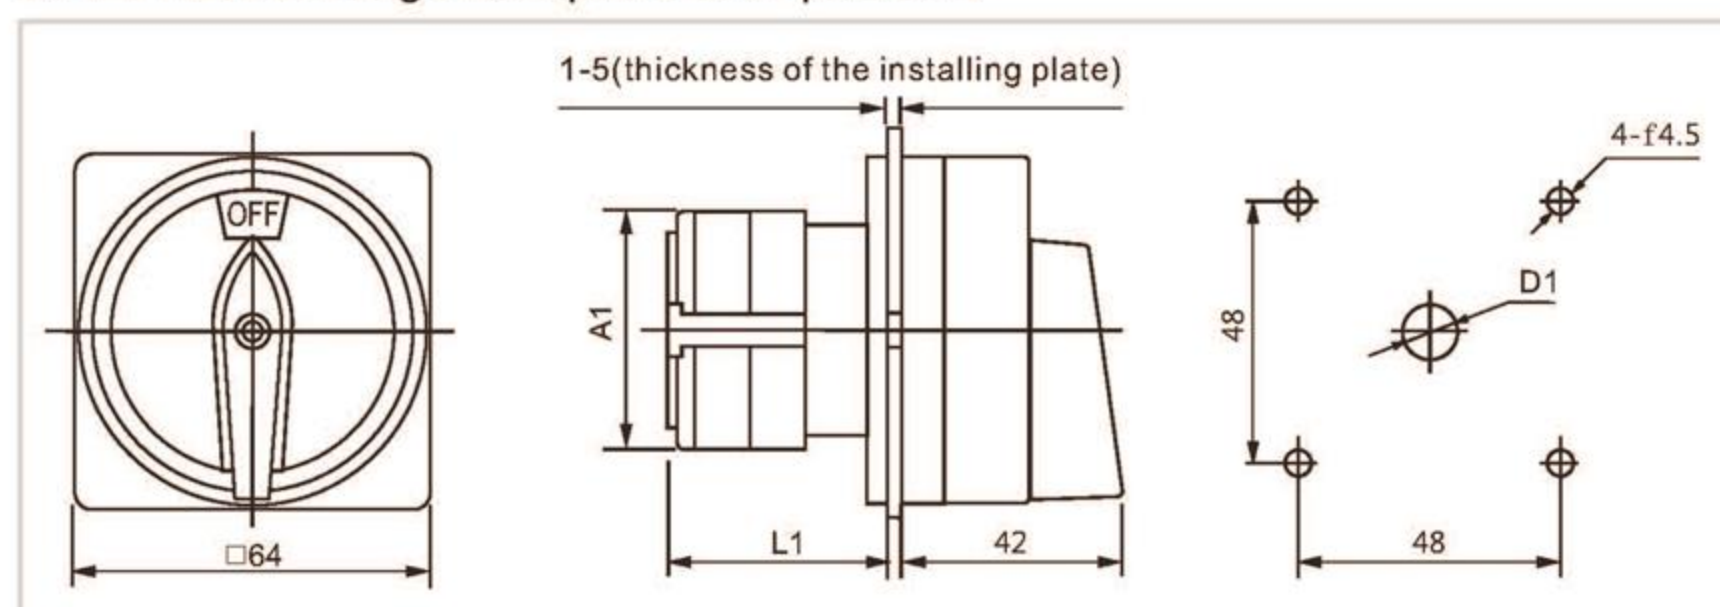

Deiscription	Dimension(mm)		
	A1	L1	D1
SA16 P□□	43	43	φ 8.5
SA25 P□□	45.2	51	φ 8.5
SA32 P□□	58	55	φ 10
SA63 P□□	66	72.5	φ 10