


# JHUKK单级分线盒


JHUKK SERIES UNIPOLAR JUNCTION BOX



接线盒系列  
**CONNECTOR BOX SERIES**

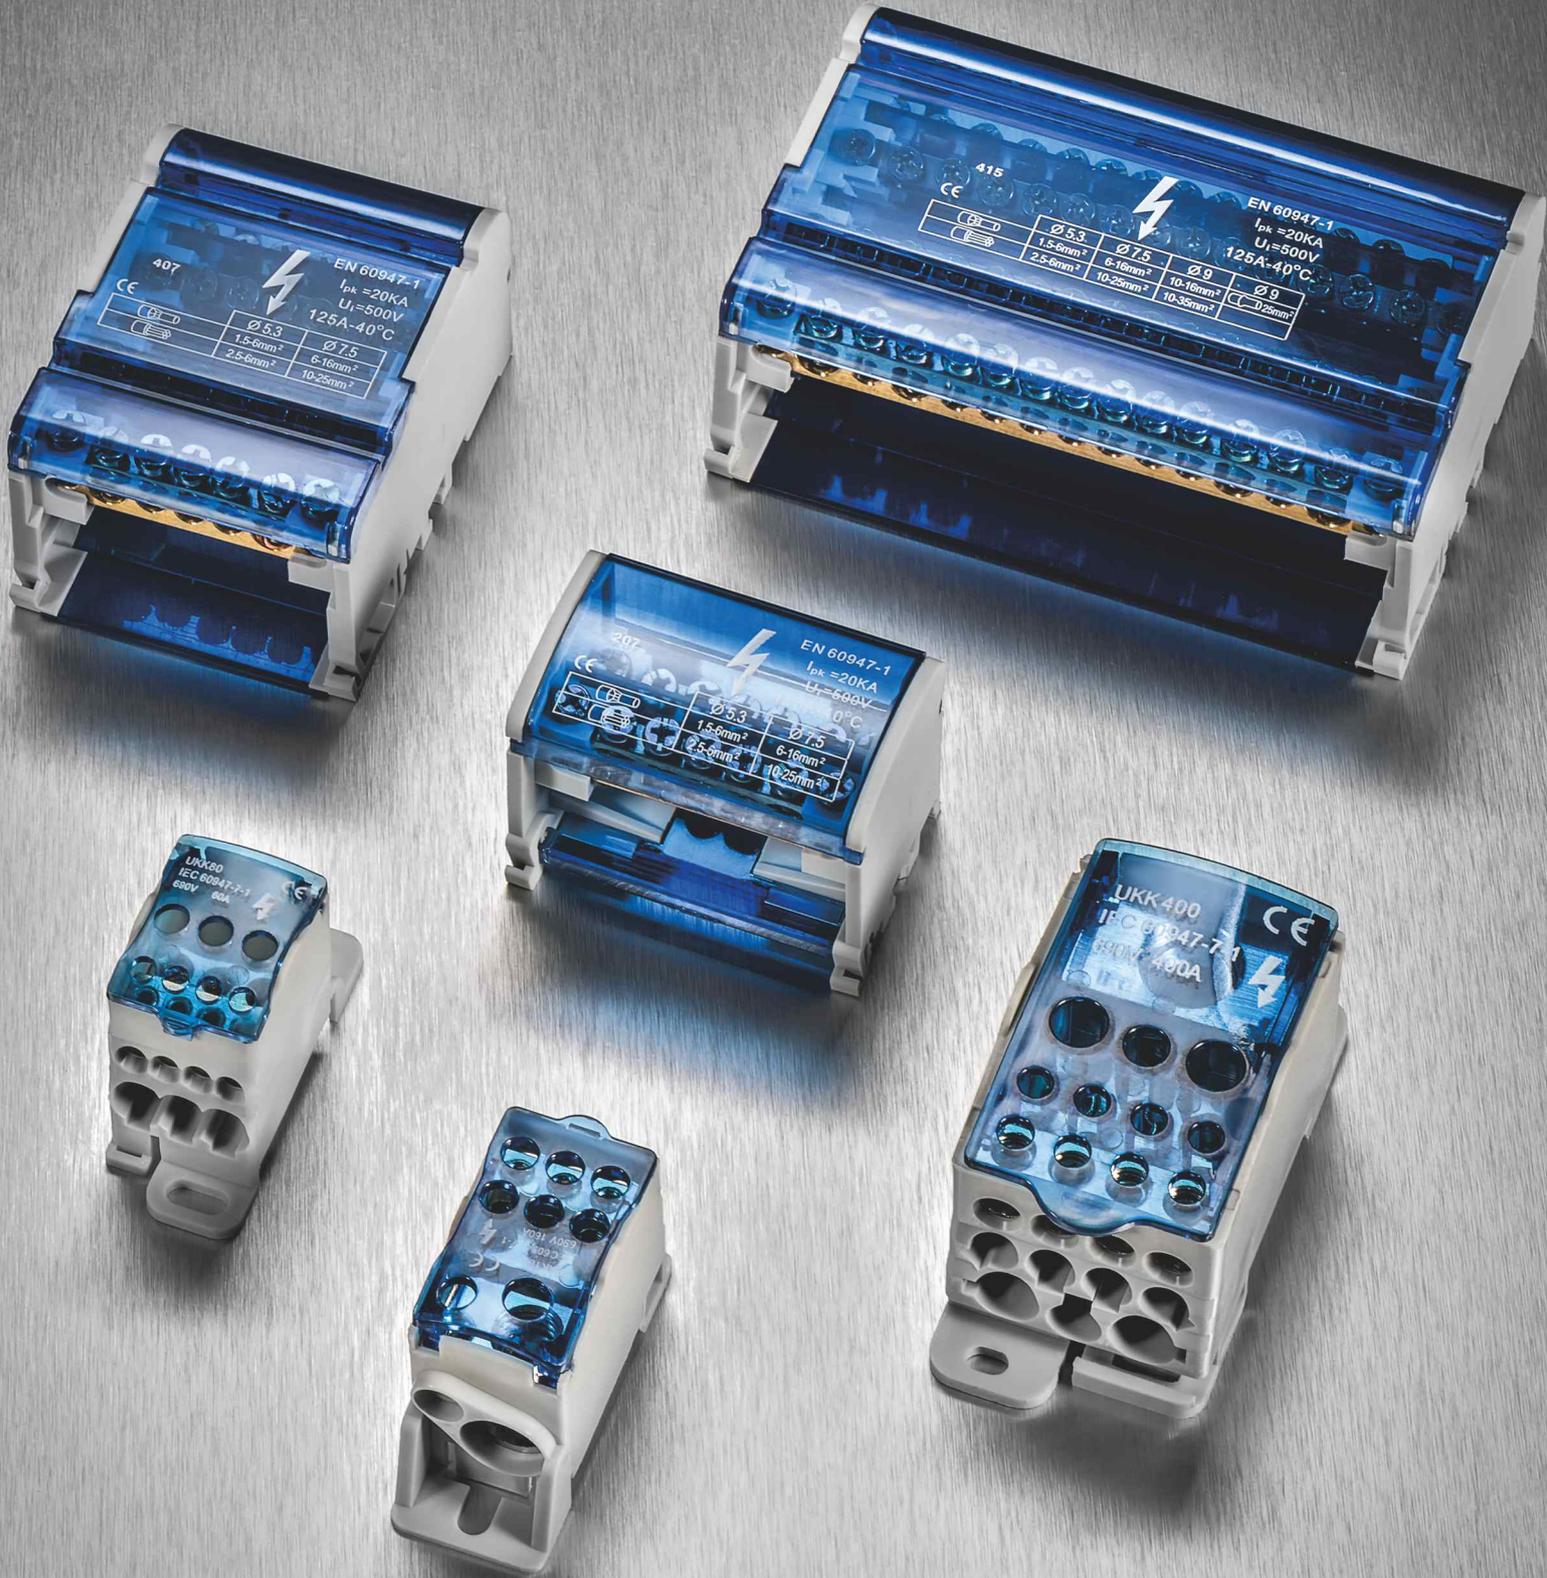


JH8207




JH8211



JH8407



JH8411



JH8215



JH8415

Connection with or without ferrules  
supplied with insulated back plate and transparent protective front cover. self-extinguishing  
960 mounting methods  
· Fix on din-rail  
· On plate with 2 screws  
when installing under a front plate, a blanking plate can be clipped onto the front plate  
insulation protection on each bar  
each bar can be labelled using cab 3tm  
conform to standard EN60947-1  
Icc: 20ka peak



Item No.	Bus bar spec.	No. of Bus Bar	Conductor connection range (flexible wire mm <sup>2</sup> )	Conductor connection range (rigid wire mm <sup>2</sup> )	Dimensions (L×W×H) (mm)
JH8207	5×Φ5.5mm 2×Φ7.5mm	2	1.5 to 6 6 to 16	2.5 to 6 10 to 25	65×42×50
JH8211	7×Φ5.5mm 2×Φ7.5mm 2×Φ9mm	2	1.5 to 6 6 to 16 10 to 16	2.5 to 6 10 to 25 10 to 35	100×42×50
JH8215	11×Φ5.5mm 2×Φ7.5mm 2×Φ9mm	2	1.5 to 6 6 to 16 10 to 16	2.5 to 6 10 to 25 10 to 35	135×42×50
JH8404	4×Φ6mm	4	1.5 to 6	2.5 to 6	43×85×50
JH8407	5×Φ5.5mm 2×Φ7.5mm	4	1.5 to 6 6 to 16	2.5 to 6 10 to 25	65×85×50
JH8411	7×Φ5.5mm 2×Φ7.5mm 2×Φ9mm	4	1.5 to 6 6 to 16 10 to 16	2.5 to 6 10 to 25 10 to 35	100×85×50
JH8415	11×Φ5.5mm 2×Φ7.5mm 2×Φ9mm	4	1.5 to 6 6 to 16 10 to 16	2.5 to 6 10 to 25 10 to 35	135×85×50

# 大电流接线盒系列

HIGH CURRENT DISTRIBUTION JUNCTION BOX

JH8413-160A

