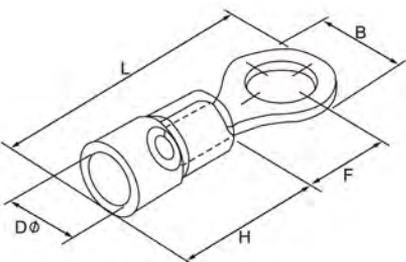


## 圆形预绝缘端头(TO-JTK型)

## RING VINYL-INSULATED TERMINAL(TYPE TO-JTK)

■ Conductor section:0.5-1.5mm<sup>2</sup>(A.W.G22~16) I<sub>max</sub>=19A Material:Copper Thickness:0.7mm


ITEM NO.	American Bolt number	d2 φ (mm)	Dimension(mm)					Color
			B	L	F	H	D φ	
RV 1.25-3	#4	3.2	5.7	18.7	4.95	10.6	4.3	Red
RVS 1.25-3.5	#6	3.7	5.7	18.7	4.95			
RVM 1.25-3.5	#6	3.7	6.6	19.4	6.3			
RVL 1.25-3.5	#6	3.7	8.0	21.2	7.0			
RVS 1.25-4	#8	4.3	6.6	19.4	6.3			
RVL 1.25-4	#8	4.3	8.0	21.2	7.0			
RVS 1.25-5	#10	5.3	8.0	21.2	7.0			
RVL 1.25-5	#10	5.3	9.8	23	8.5			
RVS 1.25-6	1/4	6.4	9.8	23	8.5			
RVL 1.25-6	1/4	6.4	11.6	26.8	11.1			
RV 1.25-8	5/16	8.4	11.6	27.4	11.1			
RV 1.25-10	3/8	10.5	13.6	27.4	13.9			
RV 1.25-12	1/2	13.0	19.2	37.3	16.5			

■ Conductor section:0.5-2.5mm<sup>2</sup>(A.W.G16~14) I<sub>max</sub>=27A Material:Copper Thickness:0.8mm


ITEM NO.	American Bolt number	d2 φ (mm)	Dimension(mm)					Color
			B	L	F	H	D φ	
RV 2-3	#4	3.2	6.6	17.5	4.3	10.6	4.9	Blue
RVS 2-3.5	#6	3.7	6.6	17.5	4.3			
RVM 2-3.5	#8	3.7	6.6	20	6.2			
RVL 2-3.5	#6	3.7	8.5	22.8	7.75			
RVS 2-4	#8	4.3	6.6	20	6.2			
RVL 2-4	#8	4.3	8.5	22.8	7.75			
RVS 2-5	#10	5.3	8.5	22	7.75			
RVL 2-5	#10	5.3	9.5	22.6	7.25			
RVS 2-6	1/4	6.4	11.9	27.2	11.0			
RV 2-8	5/16	8.4	11.9	27.2	11.0			
RV 2-10	3/8	10.5	13.6	31.1	13.9			
RV 2-12	1/2	13.0	19.2	36.8	16.5			

■ Conductor section:2.5-4mm<sup>2</sup>(A.W.G14~12) I<sub>max</sub>=37A Material:Copper Thickness:1.0mm


ITEM NO.	American Bolt number	d2 φ (mm)	Dimension(mm)					Color
			B	L	F	H	D φ	
RV 3.5-4	#8	4.3	8.0	24.5	7.7	13.5	6.2	Black
RVS 3.5-5	#10	5.3	8.0	24.5	7.7			
RVL 3.5-5	#10	5.3	12.0	29	7.7			
RV 3.5-6	1/4	6.4	12.0	29	7.7			

■ Conductor section:4-6mm<sup>2</sup>(A.W.G12~10) I<sub>max</sub>=48A Material:Copper Thickness:1.0mm


ITEM NO.	American Bolt number	d2 φ (mm)	Dimension(mm)					Color
			B	L	F	H	D φ	
RV 5.5-3.5	#6	3.7	7.2	22	5.3	13.5	6.7	Yellow
RVS 5.5-4	#8	4.3	7.2	22	5.3			
RVL 5.5-4	#8	4.3	9.5	26.2	8.25			
RV 5.5-5	#10	5.3	9.5	26.2	8.25			
RVS 5.5-6	1/4	6.4	12.0	32.1	10.7			
RVL 5.5-6	1/4	6.4	12.0	32.8	13			
RV 5.5-8	5/16	8.4	15.0	34	13.7			
RV 5.5-10	3/8	10.5	15.0	34	13.7			
RV 5.5-12	1/2	13.0	19.2	38.8	16			

