



Product designation			Auxiliary contact
Product type designation			BFX10
Contact characteristics			
Number of poles	Nr.	2	
Rated insulation voltage Ui IEC/EN	V	690	
Rated impulse withstand voltage Uimp	kV	6	
IEC Conventional free air thermal current Ith	A	10	
Tightening torque for terminals	min	Nm	0.8
	max	Nm	1
	min	lbin	7
	max	lbin	9
Max number of wires simultaneously connectable	Nr.	2	
Conductor section			
AWG/Kcmil			
	max	14	
Flexible w/o lug conductor section	min	mm²	0.75
	max	mm²	2.5
Flexible c/w lug conductor section	min	mm²	0.75
	max	mm²	2.5
Flexible with insulated spade lug conductor section	min	mm²	0.75
	max	mm²	2.5
Mechanical features			
Operating position	normal allowable	On vertical plane Any	
Fixing		Front centre mounting	
Weight	g	48	
Terminals screw		Screw	
Auxiliary contact characteristics			
Type of contact		1NO+1NC	
Thermal current Ith	A	10	
IEC/EN 60947-5-1 designation		A600 - Q600	
Operating current AC15	230V 400V 500V	A A A	3 1.9 1.4
Operating current DC13	24V 48V 60V	A A A	3 1.5 1.2

110V	A	0.6
125V	A	0.55
220V	A	0.27
600V	A	0.1

Electrical characteristics

Conductivity	5V 10 mA
UL/CSA and IEC/EN 60947-5-1 designation	A600 Q600
Operating current AC15	

120V	A	6
240V	A	3
480V	A	1.5
600V	A	1.2

Operating current DC13

12V	A	10
250V	A	0.27
440V	A	0.15
500V	A	0.13

UL technical data

Rated operational voltage AC (UL)	V	600
-----------------------------------	---	-----

Ambient conditions

Temperature

Operating temperature


min	°C	-50
max	°C	+70

Storage temperature


min	°C	-60
max	°C	+80

Max altitude	m	3000
--------------	---	------

Dimensions

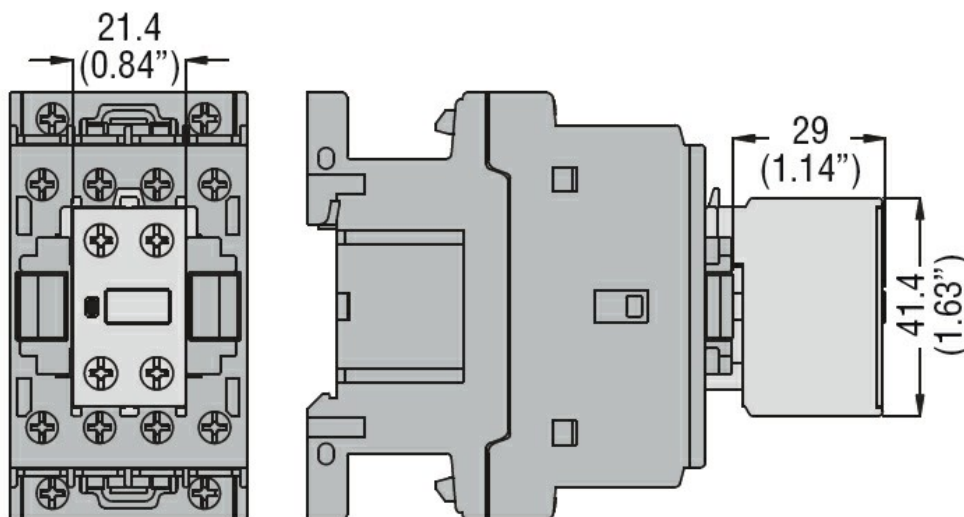

Wiring diagrams

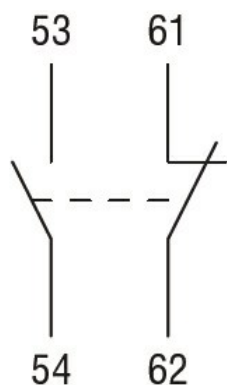

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1
CSA C22.2 n° 60947-5-1
IEC/EN 60947-1
IEC/EN 60947-5-1
UL 60947-1
UL 60947-5-1

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000041 -
Auxiliary contact
block